

HEVC/UHD Low Latency Encoder X500E

IP Video distribution with HEVC/UHD
Low Latency
Encoder **X500E**



X500E is a next-generation low-latency encoder, supporting broadcast level quality HEVC/H.265 compression for live IP streaming. Based on Socionext's highly reliable codec technology, X500E meets and exceeds the rigorous demands for UHD/HEVC elevated processing power, using reduced bandwidth transport capacity.

■ Features


- Broadcast level video quality
- Next-generation, HEVC UHD video over IP
- Supports HEVC (H.265), main 4:2:2 10bit, up-to level 5.1
- Low encoding latency < 50ms
- HDMI 2.0a input
- TS-UDP, RTP, RTSP, TS-SRT streaming protocols
- Web interface/HTTP control

■ Application

- Video distribution point-to-point and point-to-multipoint
- Web-casting and live-streaming
- Medical
- eLearning
- Audio/video Surveillance

■ Control Panel


[Front]



- | | |
|-----------------------------|---|
| 1 RST – Reset system | 7 LCK – Video lock indicator |
| 2 SW – General switch | 8 ACT – Streaming activity |
| 3 PWR – Power LED indicator | 9 REC – Recording activity |
| 4 ETH0 – Ethernet link | 10 USB0 – USB 2.0/3.0 host port |
| 5 ETH1 – Ethernet link | 11 USB1 – USB 2.0/3.0 host port |
| 6 STAT – Status LED | 12 RS-232 – (RJ45 CISCO cable compatible) |

(Indicated various conditions of the unit)

[Rear]

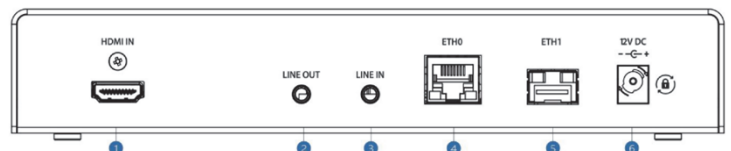

- | | |
|---|--|
| 1 HDMI IN - HDMI v2.0 video input | 4 ETH0 - RJ-45 auto sensing 10/100/1000 Mbit |
| 2 LINE OUT - Analog audio output (unbalanced) | 5 ETH1 - SFP slot supporting 1GbE module |
| 3 LINE IN - Analog audio input (unbalanced) | 6 12V DC - Input voltage |

Specifications

Item		Specification	
Video	Video Input	HDMI Type A connector, HDMI v2.0a (Non HDCP)	
	Input Resolution	4K	4096x2160p[23.97, 24, 25, 29.97, 30, 50, 59.94, 60] Hz
		UHD	3840x2160p[23.97, 24, 25, 29.97, 30, 50, 59.94, 60] Hz
		FHD	1920x1080p[23.97, 24, 25, 29.97, 30, 50, 59.94, 60] Hz
		HD	1280x720p[50, 59.94, 60] Hz, 1920x1080i[25, 29.97, 30] Hz
		SD	720x576p50 Hz, 720x576i25 Hz, 720x480p59.94 Hz, 720x480i29.97 Hz
	Output Streams	Up to 4Kp60 HEVC over IP	
	Video Compression		HEVC/H.265
			ISO/IEC 23008-2 HEVC (H.265)
	Codec features		Main 10 4:2:2, up-to level 5.1, high tier
			Configurable GOP size, FPS, BPS
		I/P/B frames support	
		4:2:0 and 4:2:2 color space	
		10/8 pixel depth	
		Supports progressive and field based interlaced coding	
		Rate control: CBR and capped VBR	
Encoding Performance		Bitrates: from 500 kbps to 80 Mbps	
		Frame rate: full, 1/2, 1/4, 1/8 of the input frame rate	
Audio	Audio Input (Audio output: no support)	HDMI embedded audio Analog audio unbalanced (PL stereo connector)	
	Audio Sample Format	Single stereo channel audio at Fs = 48kHz, 16bit per/sample	
	Audio Compression	MPEG-2 AAC-LC (ISO/IEC 13818-7), configurable bitrate 64-256kbps	
Latency	Latency Modes	Low latency mode: < 50 ms (encoding latency at 4Kp60 20 Mbps with 1GbE I/F)	
		Normal mode latency: up to 2000 ms depending on GOP structure Note: The stream is compliant to RFC-7798, RTP for HEVC	
Interfaces	Ethernet	Eth0: RJ45, Ethernet 10/100/1000 Base-T, auto-neg, auto-sense, half/full duplex Eth1: no support	
	Streaming Protocols	TS-UDP	Transport Stream over UDP (Unicast/Multicast)
		RTP	Real-Time Protocol over UDP (Unicast/Multicast)
		RTSP	Real-Time Streaming Protocol (Unicast, single client)
		TS-SRT	Transport Stream over SRT (Unicast)
	Other Protocols	HTTP, IGMP V1/V2, DHCP client	
	Other Interfaces		2 x USB 2.0/3.0 host ports (not for storage) RS-232 (RJ45 Cisco cable compatible): no support
			LED indicators (Power on, Ethernet link, Status, Video lock, Streaming, Recording(no support)) Tactile switches
Encoder Management		Web-based interface via browser REST API Remote firmware upgrade via browser or REST API Hardware button for resetting factory defaults	
Dimensions (W x H x D)		214mm x 37mm x 155mm	
Weight		730g	
Operational Temperature		0-50°C	
Operational Humidity		Up to 90%, non-condensing	
Power Supply		12 VDC @5A	
Power Consumption		Typical: 18-20W (varies according to use case)	
Regulatory Compliance		FCC part 15 class B, CE, KC class A	

The Products and product specifications described in this document are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements. All company names, brand names and trademarks herein are property of their respective owners.

Copyright 2019-2020 Socionext Inc.
AD04-00129-4E February 2020

Edited : Video Distribution Solution Team, Consumer Business Group

Socionext Inc.

Nomura Shin-Yokohama Bldg.,
2-10-23 Shin-Yokohama,
Kohoku-ku, Yokohama, Kanagawa, 222-0033, Japan
Tel. +81-45-568-1015
<http://socionext.com>